

MSR 12 plug-in module T24HUM8

The T24HUM8 additional module for the MSR 12 processes and logs the values measured by external temperature or humidity sensors.

Module T24


Measured parameters:	Temperature
Display/measurement range:	±150 °C
Display resolution:	0.01 °C
Measurement rate:	1 s intervals every 10 s every 30 s every 60 s
Storage rate:	Every n th measurement value is stored (n= 1-256)
Mode of operation:	Simultaneous measurement of all temperatures
Input:	Max. 24 temperature sensors
Storage capacity:	1 000 000 measurements

Module HUM8

Measured parameters:	Relative humidity Temperature of humidity sensor
Display/measurement range:	0-100 % relative humidity ±100 °C
Display resolution:	0.01 % 0.01 °C
Measurement rate:	1 s intervals every 10 s every 30 s every 60 s
Storage rate:	Every n th measurement value is stored (n= 1-256)
Mode of operation:	Simultaneous measurements of all humidities
Input:	Max. 8 humidity sensors
Storage capacity:	1 000 000 measurements

General

Integration with MSR 12:	By qualified personnel	
Item number:	B1006	
Attachable sensors:	Sensors	Item number
	Temperature sensor T-3	B10012, B10013
	Core temperature sensor	B10014
	Humidity sensor HUM	B10011

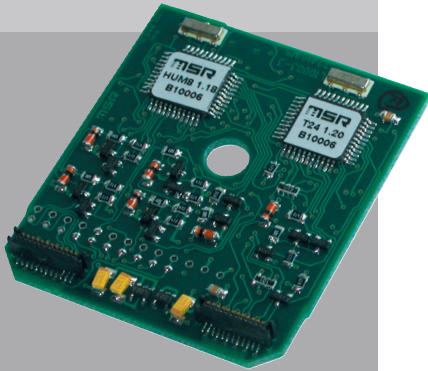

MSR Electronics GmbH
Oberwilerstrasse 16

中国代理商：
宏科汽车技术研究中心
广州市五山华南理工大学国家科技园
2号楼 504-505 室 邮编：510640
电话：020-38743030; 38743032;
020-38743233
传真：020-38743233
sales@hkaco.com
www.hkaco.com

Distributor:

