


# Cubro 10/100 Copper TAP

## PRODUCT REVIEW

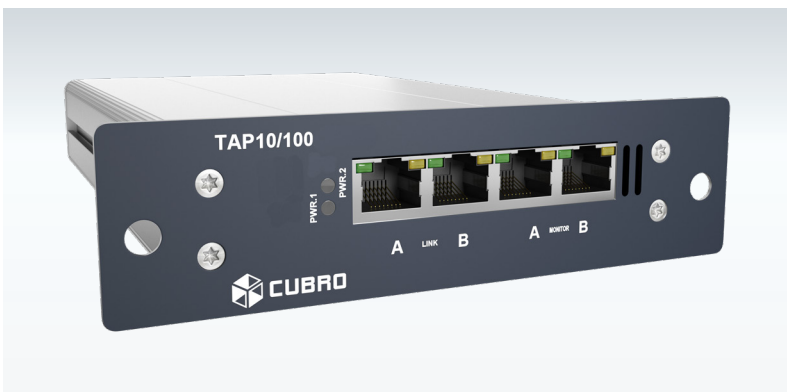

The Cubro fast ethernet 10/100 Copper TAP provides passive monitoring access to a single full-duplex network. The copper network TAP provides the highest performing and most cost-effective access to devices for passively monitoring your network. The TAP has 100 % throughput, very low delay and fully transparent, even for layer 1 and layer 2 faults.

The copper TAP, intended for permanent installation in the entire network, allows the user to plug and play multiple monitoring devices without disrupting the existing network connection. Additionally, the TAP provides an invaluable frontline of defence by preventing the monitoring device from being seen or hacked by intruders. Designed to maintain network connectivity during power loss, this TAP also consistently delivers zero data loss while replicating network traffic to the monitoring ports for cable lengths of up to the 100m IEEE 802.3 specification limit.

### Functions / Benefits:

- Link Forwarding - Each side of the link will be forward to a designated output port
- Jumbo Frame Support - The Cubro Aggregation TAP supports jumbo Ethernet frames with a size of up to 9000 Bytes.
- LINKSAVE Function - Special LINKSAVE Function enables secure Network Links even if the power supply fails. So the TAP does not influence the network, even if it is not powered.

## Network TAP

### At a glance

#### Definition

A network TAP (test access point) is an external monitoring device that mirrors the traffic that passes between two network nodes. A TAP is a hardware device inserted at a specific point in the network to monitor data.

#### Advantages of Copper TAP

- Provides complete traffic visibility and access to any network connection
- Transparent access
- Transfers all network traffic, including errors to the monitoring tools
- Easy operation and installation
- No PC or software necessary
- No bugs, no software updates means more time for your business
- LEDs on the front panel indicates power link and activity status

## PRODUCT CAPABILITIES / FEATURES

|                                 |  |
|---------------------------------|--|
| Network Port Connector          | RJ45   |
| Monitor Port Connector          | RJ45   |
| Network Port Link Speed         | Supports 10M and 100M (fully passive connection; TAP doesn't influence link speed) |
| Monitor Port Speed              | Supports 10M and 100M (fully passive connection; TAP doesn't influence link speed) |
| Number of Monitor Ports         | 2 separated for each direction   |
| Storage Temperature             | -10°C to 75°C  |
| Operating Temperature           | 0 to 55°C  |
| Operating Humidity              | 80% maximum relative humidity  |
| Physical Dimensions (W x D x H) | 3 x 11,2 x 17 cm<br>1,8 x 4,4 x 6,7 in   |
| Housing type                    | Portable   |
| Power Rating                    | 5W   |
| Power Supply                    | 12 V DC  |
| Weight                          | 0,4kg  |

All Cubro TAPs can be combined to realise large monitoring solutions. Especially, with the network packet brokers in the middle, it is possible to monitor several hundred ports with one solution.

## ORDERING INFORMATION

| Product Type & Number | Description  |
|-----------------------|--|
| CBR.TAP-10/100-B-R3   | 10/100 TAP, 1 Link, 1/3 19" rackmount housing (rackmount kit not included) |
| CBR.PS-12             | Power supply AC/DC 240V AC-85V AC to 12V DC                                |
| CBR.RM19-3            | Cubro 19" Rackmount Kit for 3x 1/3 19" units                               |



hkaco.com



关注我们

需要详细信息? 请通过sales@hkaco.com联系我们 | 电话: 400-999-3848  
**办事处:** 广州 | 北京 | 上海 | 深圳 | 西安 | 武汉 | 成都 | 沈阳 | 香港 | 台湾 | 美国