

GIGABIT PORT REPLICATOR



4 x DUPLICATION OF MIRRORED (SPAN) PORT

The Gigabit Port Replicator copies traffic from 1 x 10/100/1000 mirrored or SPAN port, to 4 x 10/100/1000 outputs.

By providing up to 4 analyzers with an exact copy of the traffic, the Gigabit Port Replicator enables greater analysis potential, while requiring only one output from the source appliance.

The Gigabit Port Replicator seamlessly duplicates 100% of the traffic it receives, ensuring total visibility over the data stream to be analyzed.

GENERAL APPLICATION

Connect a 10/100/1000 mirrored or SPAN port to the CS1G-C4G's IN port. Connect any of the CS1G-C4G's OUT ports to any hardware or software analyzer, for up to 4 traffic streams to be analyzed simultaneously.



1 x 10/100/1000 DUPLICATED TO 4 x 10/100/1000


CS1G-C4G

FEATURES

- Non-intrusive SPAN port monitoring
- No packet loss
- Monitor ports work at 100m distance
- Galvanic separation for maximum protection
- Low power consumption
- Redundant power option
- All IN and OUT ports located on the front panel
- Tested with major analysis & monitoring systems

TECHNICAL SPECIFICATIONS

CONNECTORS	ENCLOSURE
5 x RJ45 8 pins	Metal housing, structured black oven painted
OPERATING TEMPERATURE	STORAGE TEMPERATURE
0°C to 50°C	-10°C to 80°C
WEIGHT	DIMENSIONS (WxDxH)
282 g — 0.62 lb	113 x 123 x 30 mm — 4.4 x 4.8 x 1.2 in
POWERING	POWER CONSUMPTION
100–240 VAC to 12 VDC / 1250 mA PSU	0.35 A
COMPLIANCE	HUMIDITY
RoHS — CE	10 to 90%, non-condensing
OPTIONAL ACCESSORIES	
1U Rackmount Frame (ARF-1U) — Filler Plate (AFP-1U) — Extra PSU for redundancy (APWR2)	

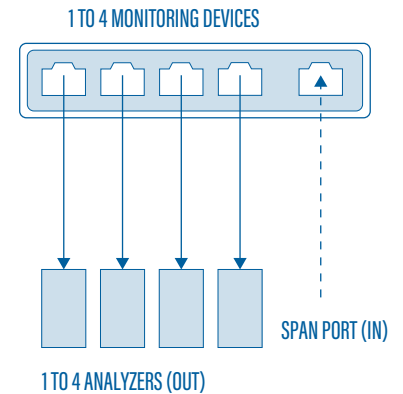

hkaco.com



加关注

需要更多信息? 请通过sales@hkaco.com联系我们。

hkaco.com

