

# eTOP504 Tech-Note

## 4.3" TFT

### ARM Cortex-A8 - 600 MHz

- 5 Year Warranty
- Innovative mechanical design and all-metal enclosure
- High-performance touchscreen HMI's
- Brilliant displays with LED technology all in full color
- Gateway function, remote installation of application and remote assistance
- Ethernet, USB, serial ports and MPI integrated
- Optional plug-in modules for fieldbus systems and networks
- Support SD Card
- Coating on all Electronic Boards
- Optional IEC 61131-3 integrated PLC (CODESYS V2 or V3)
- Front available in three colors (White/Black/Silver)
- Special versions for special applications



## Highlights

The eTOP504 compact 4,3" widescreen display completes the eTOP series 500 with a **no compromise** low-cost product.

The built-in dual 100Mb Ethernet interfaces with switch function enhance its communication capability and make it the **ideal choice for small applications**. The eTOP Series 500 combine state-of-the-art features and top performance with an **outstanding design**.

The eTOP Series 500 come with a choice of certifications and approvals that make them the solution of **choice for all requirements**.



hkaco.com




关注我们

需要详细信息? 请通过sales@hkaco.com联系我们 | 电话: 400-999-3848  
办事处: 广州 | 北京 | 上海 | 深圳 | 西安 | 武汉 | 成都 | 沈阳 | 香港 | 台湾 | 美国


# eTOP504 - Technical Data



<b>System Resources</b>	
Display - Colors	4.3" TFT 16:9 LED - 64K
Resolution	480x272, WQVGA
Brightness	150 Cd/m <sup>2</sup> typ.
Dimming	to 0%
Touchscreen	Resistive
CPU	ARM Cortex-A8 - 600 MHz
Operating System	Microsoft Windows CE 6.0
Flash	128 MB
RAM	256 MB DDR
Real Time Clock, RTC Back-up, Buzzer	Yes, Yes, Yes
<b>Interface</b>	
Ethernet port	2 (port 0 - 10/100, port 1 - 10/100) with integrated Switch
USB port	1 (port 1 - Host V2.0)
Serial port	1 (RS-232, RS-485, RS-422, MPI software configurable)
SD card	Yes
Expansion	1 slot for plug in modules
<b>Ratings</b>	
Power supply	24 Vdc (10 to 32 Vdc)
Current Consumption	0.55 A at 24 Vdc (max.)
Input Protection	Automatic
Battery	Rechargeable Lithium battery, not user-replaceable
<b>Environment Conditions</b>	
Operating Temp	0 to +50 °C
Storage Temp	-20 to +70 °C
Operating / Storage Humidity	5-85% RH, non condensing
Protection Class	IP66 (front), IP20 (rear) Type: 12, 4X
<b>Dimensions and Weights</b>	
Faceplate LxH	147x107 mm (5.78x4.21")
Cutout AxB	136x96 mm (5.35x3.78")
Depth D+T	56+4 mm (2.40+0.16")
Weight	Approx 1.0 Kg
<b>Approvals</b>	
CE	Emission EN 61000-6-4 Immunity EN 61000-6-2 for installation in industrial environments
UL	cULus: UL508
UL	cULus: Class I Div. 2
DNV-GL	Yes
RCM	Yes

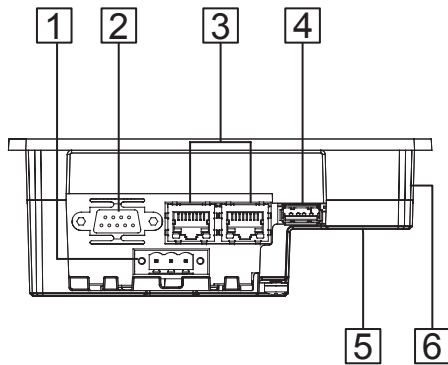

- 1 Power Supply
- 2 Serial Port
- 3 2 Ethernet Ports
- 4 USB Port
- 5 Expansion slot for Plugin module
- 6 SD Card Slot

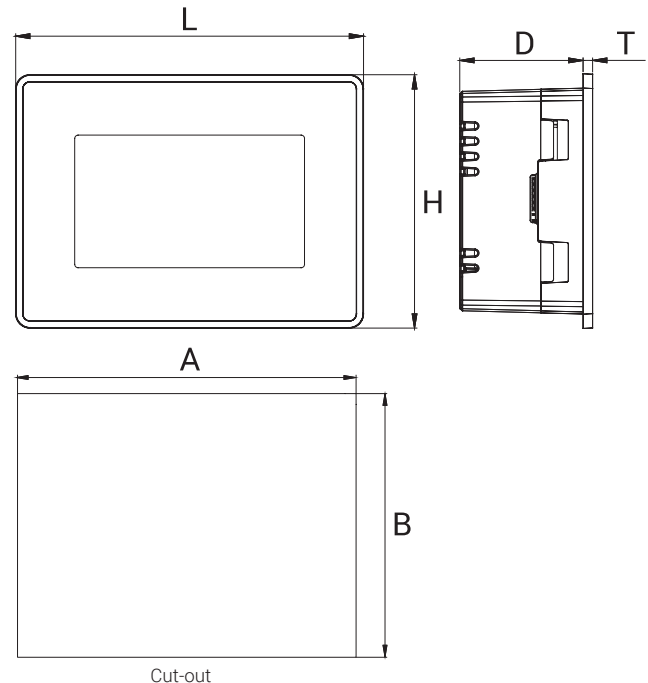

## Ordering Information

Model	Part Number	Description
eTOP504-White	+ETOP504U1P1	4.3" TFT color touchscreen panel with Ethernet interface, White front panel. JMobile runtime.
eTOP504-Silver	+ETOP504U2P1	4.3" TFT color touchscreen panel with Ethernet interface. Silver front panel. JMobile runtime.
eTOP504-Black	+ETOP504U3P1	4.3" TFT color touchscreen panel with Ethernet interface. Black front panel. JMobile runtime.
PROTFOIL-04-GL	R-PROT11	Disposable protection foil for 3.5"/3.8"/4.3" eTOP touch panels (10 pieces)
PROTFOIL-04-UV	R-PROT17	Disposable protection foil for 3.5"/3.8"/4.3" eTOP touch panels (10 pieces). UV resistant