

Squirrel SQ2020 Wi-Fi

Powerful data loggers for all applications

Overview


The Squirrel SQ2020 Wi-Fi hand held data logger combines high performance and universal inputs with the simplicity of Wi-Fi networking in a compact and easy-to-use instrument.

Using high accuracy, 24-bit analogue to digital converters, removable memory and Wi-Fi wireless Ethernet networking, the SQ2020 Wi-Fi is the ideal data logger for industrial, scientific research and quality assurance applications. Together with our comprehensive suite of software, SquirrelView, the SQ2020 provides standalone data acquisition, simple Wi-Fi networking, real-time metering and data analysis straight out-of-the-box.



Key features

- 8 true differential or 16 single ended universal analogue inputs for voltage, current or resistance measurements plus 2 high voltage, 4 pulse and 8 digital event/state inputs
- Analogue inputs can be used with thermistors, thermocouples, 2, 3 or 4 wire RTD temperature sensors and 4-20mA signals
- Logging rates of up to 100Hz on up to two channels
- Large non-volatile internal memory storage for up to 14 million readings
- Standard (802.11b) wireless (Wi-Fi) Ethernet networking, USB and RS232 communication ports
- Download of internal data to removable MMC/SD (Multi Media Card / Secure Digital) memory
- Sensor power and FET outputs for use with external devices
- Easy to read LCD and simple 4 button user interface
- Up to 16 calculated / derived channels may be created using mathematical functions

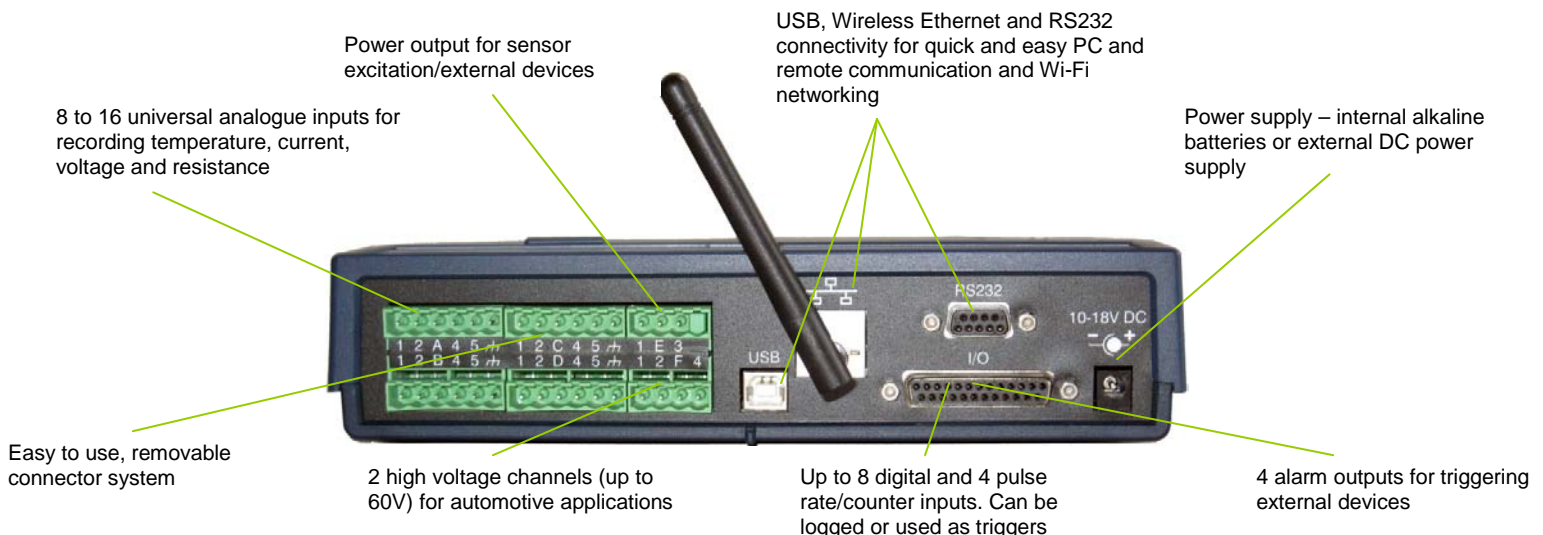

Communications:

Wireless Ethernet, USB and RS232 serial ports are in-built. This allows simple wireless connection to a PC based TCP/IP network, or to a GSM modem for remote data downloading. This flexibility enables global data access and retrieval as well as complete system integration of the SQ2020 Wi-Fi into complex and critical applications.

Multiple configurations stored in the logger:

Up to six logger configurations (channel type, names, logging speeds, triggers etc), together with the current configuration, can be held in the logger's internal memory. Additional configuration settings can also be loaded from the external MMC/SD memory card. This allows the operator to quickly and easily switch between logger configurations without the need for a PC.

Comprehensive software configuration via SquirrelView:

The SquirrelView software (supplied with the SQ2020 Wi-Fi) allows logger configuration, data download and data export whilst giving the user full control over the SQ2020. The optional SquirrelView Plus gives the user access to many advanced data analysis and data archiving/transfer features. Please refer to our separate SquirrelView data sheet for all of its advanced features.

Concurrent sampling:

The SQ2020 uses multiple analogue to digital converters that enable true concurrent sampling and logging. This allows the user to configure a channel to log at a rate of 100Hz whilst retaining different sample speeds on other channels. This makes the SQ2020 Wi-Fi ideal for measuring dynamic parameters that change at different rates such as temperature and pressure.

System specifications:

Input channels:

		SQ2020 2F8 WI-FI
Analogue input channel options	Analogue to digital converters	2
	Differential	8
	Single ended*	16
	3 or 4 wire	4
Additional channels	Pulse	(2 x fast – 64kHz) & (2 x slow – 100Hz)
	Event/digital	8 state inputs or 1 x 8 bit binary
	High voltage	2
	Internal channels	1 temperature

*Please refer to our Technical Note for the configuration of these inputs

Standard ranges for temperature channels:

Each channel can be individually set to any of the ranges listed below. Pt100 to IEC751 and JIS1604 and Pt1000 to IEC751.

Input type	Ranges °C	Ranges °F
Y & U: Thermistor	-50 to 150	-58 to 302
Pt100/Pt1000*	-200 - 850	-328 to 1562

*2 wire only on 1F8

Input type	Ranges °C	Ranges °F
K: Thermocouple	-200 to 1372	-328 to 2501
T: Thermocouple	-200 to 400	-328 to 752
J: Thermocouple	-200 to 1200	-328 to 2192
N: Thermocouple	-200 to 1300	-328 to 2372
R & S: Thermocouple	-50 to 1768	-58 to 3214

Standard ranges for d.c. voltage:

Each voltage channel can be any of the voltage ranges below. Mixed differential and single ended configurations are permitted. Please refer to our Technical Note for the permitted combinations of inputs.

Voltage range	Voltage range	High voltage input range*
-0.075 to 0.075V	-3.0 to 3.0V	4.0 to 20.0V
-0.15 to 0.15V	-6.0 to 6.0V	4.0 to 40.0V
-0.3 to 0.3V	- 6.0 to 12.0V	4.0 to 60.0V
-0.6 to 0.6V	-6.0 to 25.0V	
-0.6 to 1.2V		
-0.6 to 2.4V		

*max of 2 may be selected

Standard ranges for current and resistance channels:

Each current channel can be any of the current ranges below. Current ranges use differential input channels.

Current range (External 10Ω shunt)	Resistance range 2 wire	Resistance range 3 and 4 wire (2F8 version)
-30.0 to 30.0mA	0.0 to 1250.0Ω	0.0 to 500.0Ω
4 to 20mA	0.0 to 5000.0Ω	0.0 to 4000.0Ω
	0.0 to 20000.0Ω	
	0.0 to 300000.0Ω	

Analogue inputs

Accuracy: (at 25°C) voltage and resistance
± (0.05% readings + 0.025% range)
Common mode rejection: 100dB
Input impedance: > 1M Ω
Linearity: 0.015%
Series mode line rejection: 50/60Hz
100dB

Analogue – digital conversion

Type: Sigma-Delta
Resolution: 24bit
Sampling rate: up to 10, 20* or 100*
readings per second per ADC.

* With mains rejection off

Alarm outputs

4 x open drain FET (18V 0.1A)

Power output for external device

Regulated 5 VDC at 50mA or logger
supply voltage at 100mA

Time and date

In-built clock in 3 formats

Scaling data

Displays readings in preferred
engineering units

Memory

Internal: up to 128Mb (Up to
14,000,000 readings)
External: Up to 1 GB (approx. 100
million readings) - removable
MMC/SD (For transferring internal
memory and storing setups only)

Calculated channels

Up to 16 virtual channels derived from
physical input channels

Resolution

Up to 6 significant digits

Programming/logger setup

SquirrelView or SquirrelView Plus
software

Communications

Wireless Ethernet (Wi-Fi):
802.11b, 2.4GHz, 1 to 14 channels
Security: Open, WEP (64 or 128bit
encryption), WPA or WPA2 / 802.11i
Network: Infrastructure only with
specified SSID, or any network with
no SSID (external mains power
required for Wi-Fi connection)
RS232: (Auto bauding to 115 K baud)
USB: 1.1 and 2.0 compatible
External options: GSM, WIFI and
PSTN Modems

Power supply

Internal: 6 x AA Alkaline batteries
External: 10-18VDC
Reverse polarity and over-voltage
protected

Power consumption @ 9V

Sleep mode: 600µA
Logging: 40-80mA

Dimensions and weight

Dimensions: W235 x D175 x H55mm
Weight: Approx 1.2kgs
Enclosure material: ABS

Memory modes (internal only)

Stop when full or overwrite

Display and keypad

2 line x 20 character LCD display
Battery state and external power
indicator
Keypad lock
Navigate to:
Arm/disarm/pause/continue
Meter any channel or alarm
Select from up to 6 x pre-stored
setups
Status/diagnostics/memory/time
and date
Download to MMC/SD

Operating environment

-30°C to +65°C
Humidity: 90% at 40°C non-
condensing

Accessories

MPU 12V: Universal (97-263V
AC) power supply
LC76: DC lead
SQ20RB12-6: External
rechargeable battery (12V, 6Ah)
SB102: 25 way digital I/O
connector
CS202: Current shunt kit (4 x 10Ω
□0.125W□
PEL4: Rugged weather proof
enclosure
CAL2020: Test and Calibration
certificates
SQ20A802: External GSM
communications kit
MMC64: Multi Media Card
(Please see price list for additional
accessories)

Please note: SQ2020 Wi-Fi is
supplied complete with software,
manual, USB cable, wall bracket,
batteries and 4 current shunt
resistors

Grant

Grant Instruments (Cambridge) Ltd
Shepreth, Cambridgeshire SG8 6GB
England

Tel: +44 (0) 1763 260 811
Fax: +44 (0) 1763 262 410

广州虹科电子科技有限公司

广州市五山华南理工大学国家科技园
2 号楼 504-505 室 邮编 : 510640
电话 : 020-3874 3030; 3874 3032
传真 : 020-3874 3233

信息: info@hkaco.com
销售: sales@hkaco.com
支持: support@hkaco.com
www.hkaco.com